


Dome Camera



SPECIFICATION


Model	BX4DCI
Image pick-up Device	1/3" SHARP CCD
TV System	NTSC/PAL
Number of Pixels	NTSC:510(H)x492(V); PAL:500(H)x582(V)
Scanning System	NTSC:525 Lines,60 Field / Sec,PAL:625 Lines 50 Field /Sec
Sync System	Internal Synchronization
Horizontal Resolution	420 TV Lines
Waterproof and Anti-fog	Ip66
Audio	Yes
Video Output	1.0Vp-p 75 ohm
S/N Ratio	≥48dB(AGC Off)
Usable Illumination	0Lux (24pcs LEDs ON for night vision 15M)
Lens	2.9mm/3.6mm Lens optional
Lens Angle	115° ±5%
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-30°C ~ +70°C RH95% Max
Current	60mA(Daytime)/IR140mA(Night)
Camera housing	Aluminum case
Power Supply	DC 12V ±10%

2. DIMENSIONS



φ 110mm(D)x105mm(H)

3. INSTRUCTION

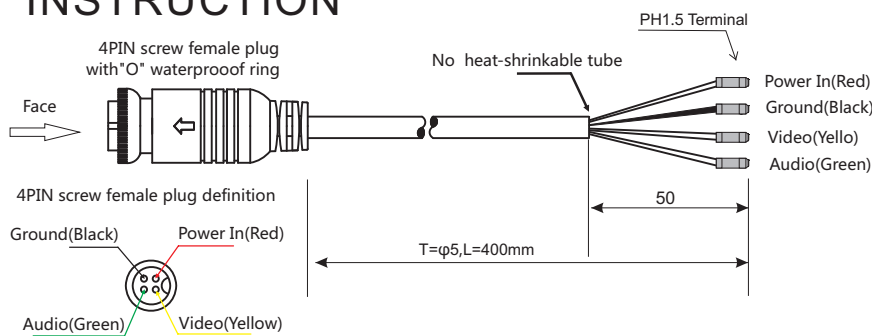

TTI Tracking Technology Inc.
Suite 200 - 4170 Still Creek Drive
Burnaby
BC
V5C 6C6
Canada
www.tti.info

Ref:ReDF-9803A